


# THE Honey

## FRAMED 60 LAYOUT MODULE

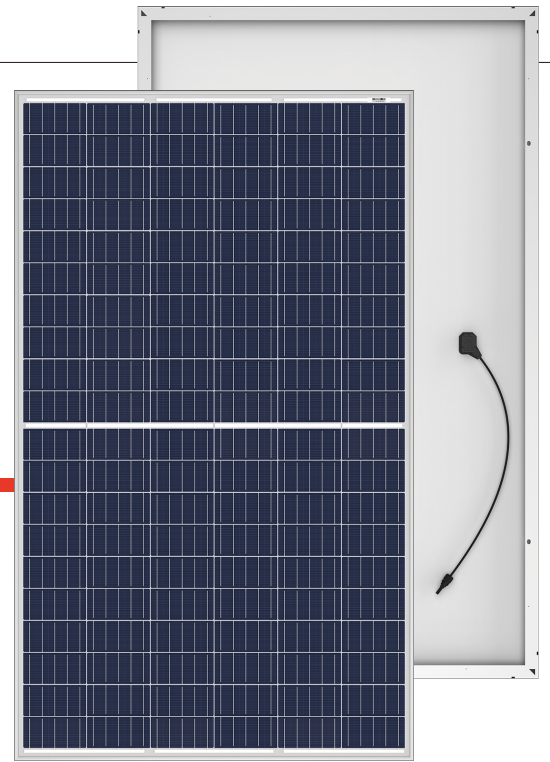

**60 LAYOUT**  
MULTICRYSTALLINE

**285-300W**  
POWER OUTPUT RANGE

**17.6%**  
MAXIMUM EFFICIENCY

**0~+5W**  
POSITIVE POWER TOLARANCE

PRODUCTS | POWER RANGE  
TSM-PE06H | 285-300W



### Ideal for large scale installations

- Reduce BOS cost with higher power bin and 1500V system voltage



### Half-cell design brings higher efficiency

- LRF(Light Redirecting Film) integrated to gain more power
- Low thermal coefficients for greater energy production at high operating temperature
- Low cell connection power loss due to half-cell layout (120 multicrystalline)



### Highly reliable due to stringent quality control

- Over 30 in-house tests (UV, TC, HF etc)
- Internal test requirement of Trina more stringent than certification authority
- PID resistant
- 100% EL double inspection



### Certified to withstand the most challenging environmental conditions

- 2400 Pa negative load
- 5400 Pa positive load
- \* 2400/5400 is the measured load,and the safety factor is 1.5 times

Founded in 1997, Trina Solar is the world's leading comprehensive solutions provider for solar energy. we believe close cooperation with our partners is critical to success. Trina Solar now distributes its PV products to over 60 countries all over the world. Trina is able to provide exceptional service to each customer in each market and supplement our innovative, reliable products with the backing of Trina as a strong, bankable partner. We are committed to building strategic, mutually beneficial collaboration with installers, developers, distributors and other partners.


### Comprehensive Products And System Certificates

IEC61215/IEC61730/UL1703/IEC61701/IEC62716  
 ISO 9001: Quality Management System  
 ISO 14001: Environmental Management System  
 ISO14064: Greenhouse gases Emissions Verification  
 OHSAS 18001: Occupation Health and Safety Management System




### LINEAR PERFORMANCE WARRANTY


10 Year Product Warranty · 25 Year Linear Power Warranty

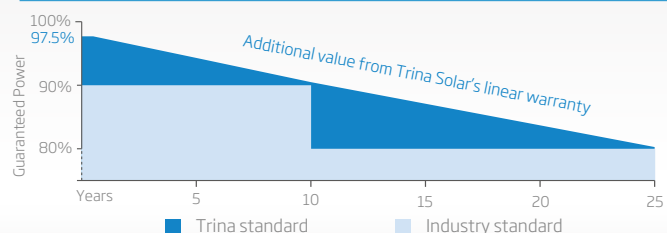


### DIMENSIONS OF PV MODULE(mm)

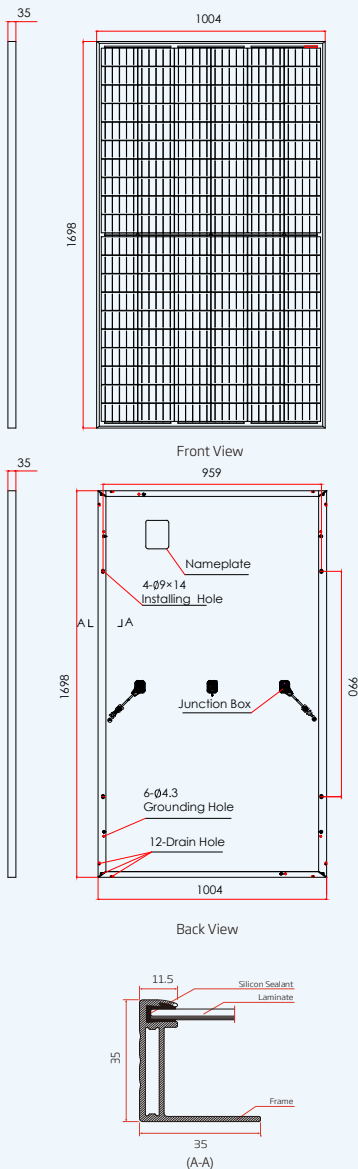

### I-V CURVES OF PV MODULE(290W)

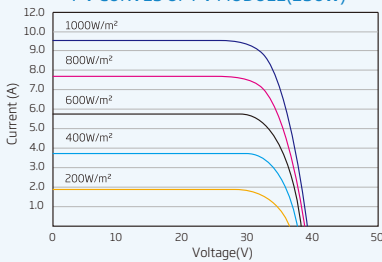

### P-V CURVES OF PV MODULE(290W)

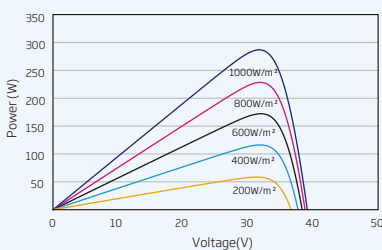

### ELECTRICAL DATA (STC)

Peak Power Watts-PMAX (Wp)*	285	290	295	300
Power Output Tolerance-PMAX (W)	0 ~ +5			
Maximum Power Voltage-VMPP (V)	31.5	31.8	32.1	32.3
Maximum Power Current-IMPP (A)	9.05	9.12	9.19	9.29
Open Circuit Voltage-VOC (V)	38.8	39.2	39.5	39.8
Short Circuit Current-ISC (A)	9.53	9.60	9.67	9.77
Module Efficiency $\eta_m$ (%)	16.7	17.0	17.3	17.6

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5.  
\*Measuring tolerance: ±3%.

### ELECTRICAL DATA (NMOT)

Maximum Power-PMAX (Wp)	216	219	223	227
Maximum Power Voltage-VMPP (V)	29.8	30.1	30.4	30.6
Maximum Power Current-IMPP (A)	7.24	7.29	7.35	7.42
Open Circuit Voltage-VOC (V)	36.5	36.9	37.2	37.4
Short Circuit Current-ISC (A)	7.69	7.74	7.80	7.88

NMOT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

### MECHANICAL DATA

Solar Cells	Multicrystalline
Cell Orientation	120 cells (6 × 20)
Module Dimensions	1698 × 1004 × 35 mm (66.85× 39.53 × 1.38 inches)
Weight	18.7kg (41.2 lb)
Glass	3.2 mm (0.13 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant Material	EVA
Backsheet	White
Frame	35 mm (1.38 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm <sup>2</sup> (0.006 inches <sup>2</sup> ), Portrait: N 140mm/P 285mm(5.51/11.22inches) Landscape: N 1200 mm /P 1200 mm (47.24/47.24 inches)
Connector	TS4 / MC4 EVO2

### TEMPERATURE RATINGS

NMOT (Nominal Module Operating Temperature)	41°C (±3°C)
Temperature Coefficient of PMAX	- 0.38%/°C
Temperature Coefficient of VOC	- 0.31%/°C
Temperature Coefficient of ISC	0.05%/°C

(DO NOT connect Fuse in Combiner Box with two or more strings in parallel connection)

### MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC) 1500V DC (UL)
Max Series Fuse Rating	20A

### WARRANTY

10 year Product Workmanship Warranty
25 year Linear Power Warranty

(Please refer to product warranty for details)

### PACKAGING CONFIGURATION

Modules per box: 30 pieces
Modules per 40' container: 720 pieces

